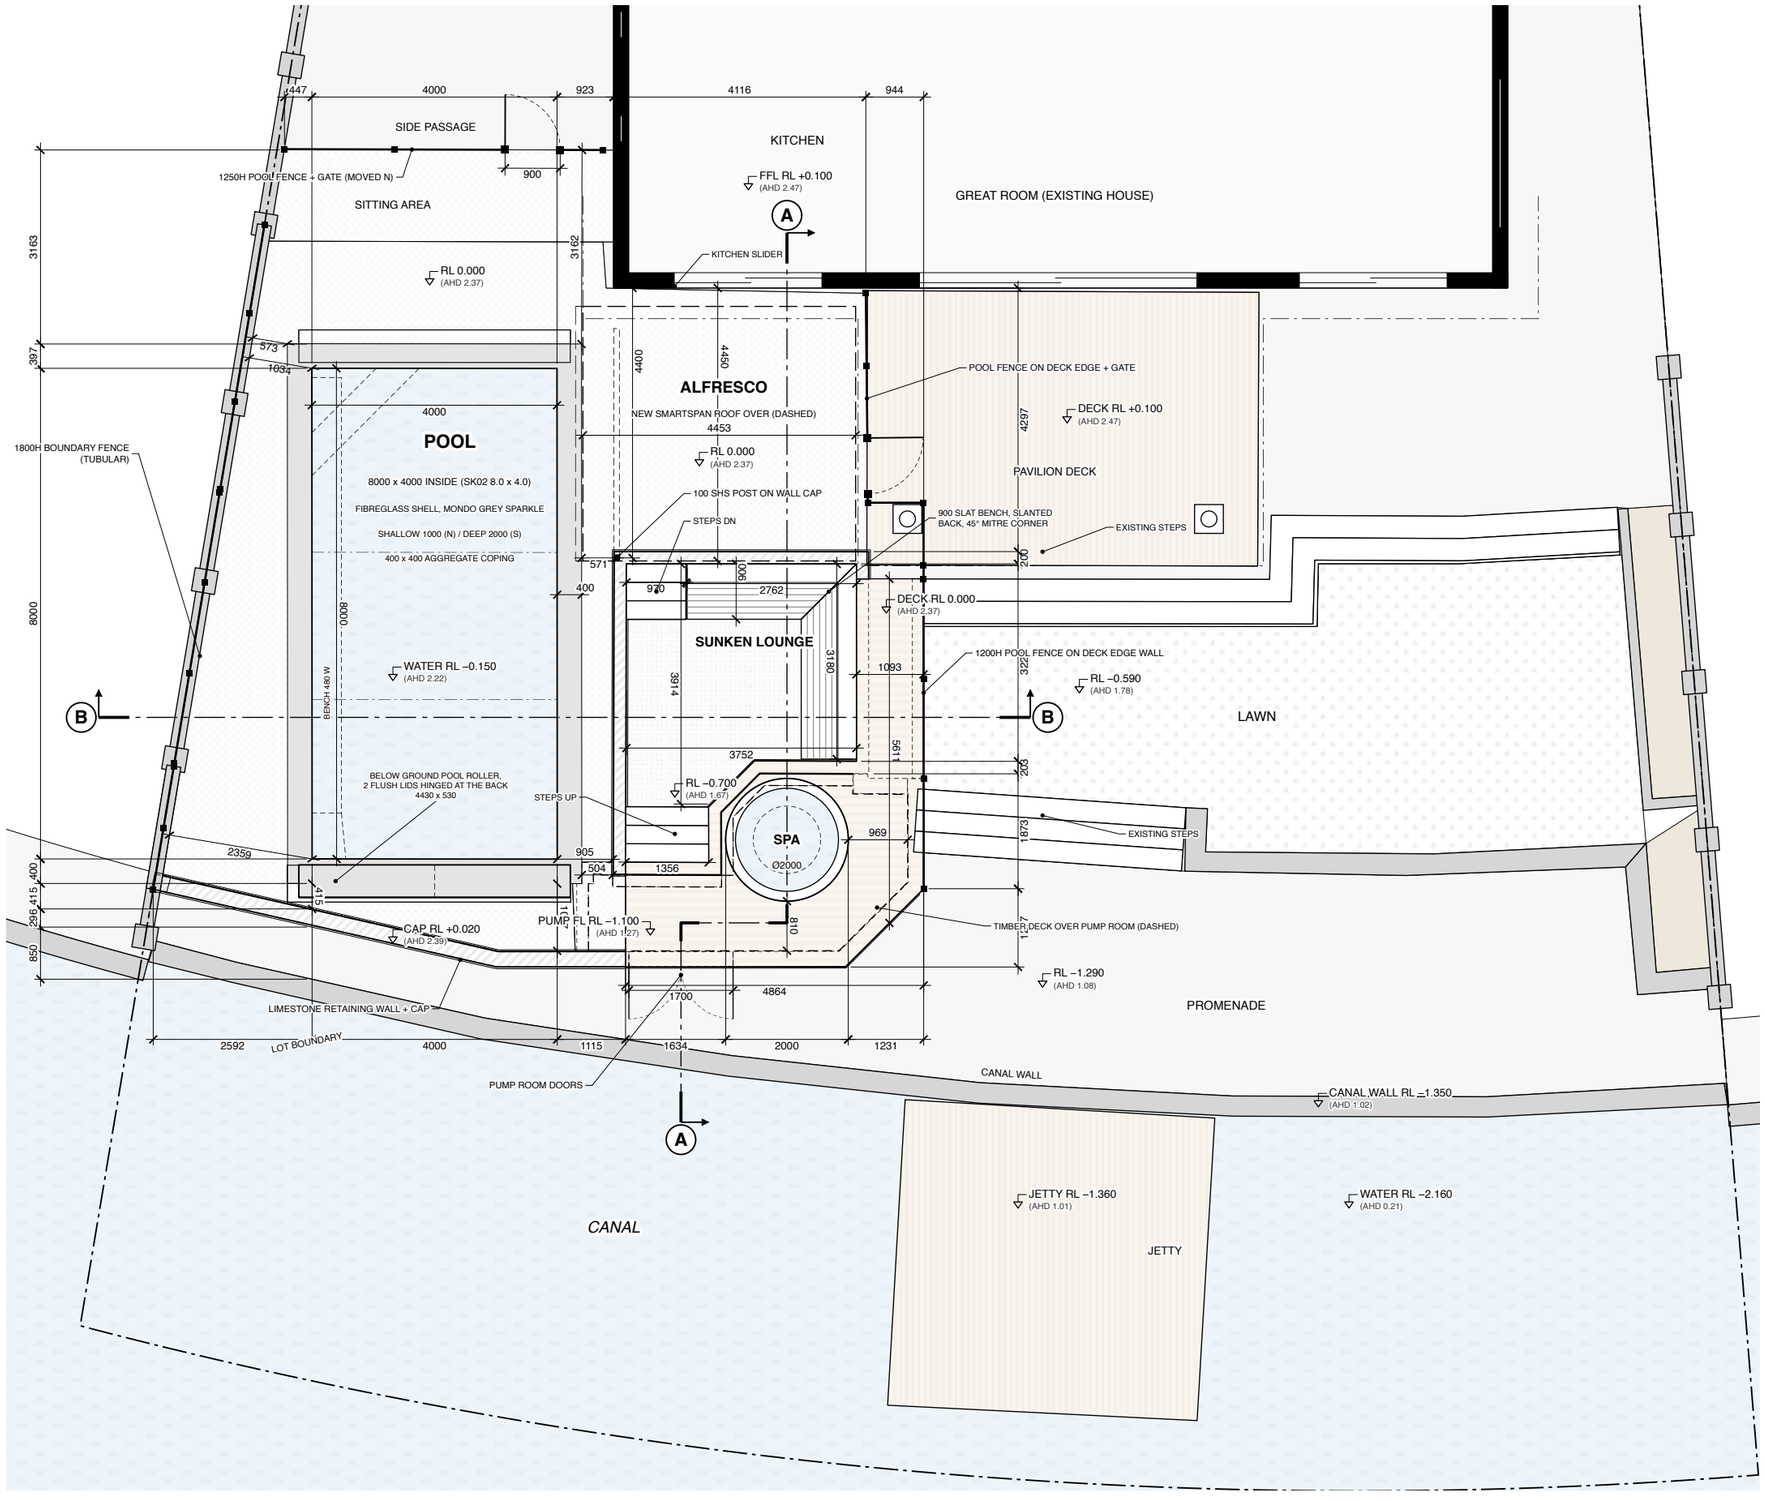


FLOOR PLAN

SCALE 1:100 @ A3

N

SCALE 1:100 @ A3

0 1 2 3 4 5 10 m

- Exposed aggregate concourse, RL 0.000
- Precast aggregate coping / wall caps
- Composite timber deck, RL 0.000
- New limestone facebrick walls
- Existing walls (survey)
- Pool / spa water, canal
- Crushed limestone (lounge floor)
- Lawn
- Pool fence / barrier with posts
- Alfresco roof outline over
- Pump room below deck
- Lot boundary

NOTES

Dimensions in millimetres, measured from the 3D model. Check on site before building.

Levels: RL 0.000 = AHD 2.37 (the existing rear paving, Bob's datum on SK02). House FFL RL +0.100 (AHD 2.47).

Boundaries, existing walls, steps, canal wall and jetty from the Denada feature survey (job 25475, 20 Jul 2026). Pool, spa, lounge, deck and fences from SK02 as revised by the owners.

Pool shell, steps and bench to the manufacturer's details. Spa rim 20 mm above the deck.

Pump room under the whole deck: floor RL −1.100, 960 clear under the joists, reached only by the doors from the promenade (no deck hatch).

Alfresco: post and beam, one post on the lounge's north wall at the roof's south-west corner (1 x 100 SHS post, 240 beam). See A3-04.

Pool barrier: see A3-03. Sections: A3-02.

TO CONFIRM WITH BOB

(B1, B3 etc. are the barrier tags on A3-03.)

- B3 at its north end: only about 1440 above the existing lawn steps against it. OK as is?

- Pump room doors in B4, the canal-side barrier wall: their outside face must be non-climbable. Which door and finish?

- B1 and B3 stop 170 and 90 short of the house wall: close them up.

STATUS

Design intent from the 3D model.

For Bob Bruce to draw up.

NOT FOR CONSTRUCTION

Project:	PROPOSED POOL, SPA & ALFRESCO
Client:	CANN
Site:	35 KEEL RETREAT, PORT GEOGRAPHE

Sheet title	**FLOOR PLAN**
Date	21 Oct 2026
Revision	A
Scale	1:100

SHEET

A3-01

Rev A